

# R SERIES



# CONTENTS

<b>1</b>	<b>INTRODUCTION</b>	
1.1	DESIGN	01
1.2	FEATURES	01
<hr/>		
<b>2</b>	<b>COMPONENTS</b>	02
<hr/>		
<b>3</b>	<b>CONFIGURATIONS</b>	03
<hr/>		
<b>4</b>	<b>ASSAULT CONFIGURATION</b>	
4.1	INSTALLING THE JPC PADDED INSERT	05
4.2	INSTALLING AND ADJUSTING THE CUMMERBUNDS	06
4.3	ATTACHING THE M4 JUMP FLAP	08
4.4	INSTALLING THE DROP GP POUCH 8X5	10
4.5	ATTACHING THE ZIP-ON PACK	12
4.6	INSTALLING THE SIDE POUCHES	14
4.7	INSTALLING THE SIDE MOLLE PANEL SET	16
<b>5</b>	<b>OPERATOR INSTRUCTIONS</b>	
5.1	INSTALLING BALLISTIC PROTECTION	18
5.2	ADJUSTING THE RIDE HEIGHT (SHOULDER STRAPS)	20
5.3	ADJUSTING THE SHOULDER E-DOFF CORD	21
5.4	EMERGENCY DOFFING PROCEDURE	24
5.5	EMERGENCY DOFFING PROCEDURE	25
5.6	INSTALLING AND ATTACHING SINGLE STRAPS	26
<hr/>		
<b>6</b>	<b>JUMP CONFIGURATION</b>	
6.1	ATTACHING THE HARNESS ADAPTER TO THE M4 JUMP FLAP	28
6.2	ATTACHING THE M4 JUMP FLAP TO THE ASSAULT HARNESS	31
6.3	INSTALLING THE DROP GP POUCH 8X5	33
6.4	INSTALLING THE SIDE MOLLE PANEL SET OR SIDE POUCHES	35
6.5	ATTACHING THE M4 MAG RETAINER TO THE HARNESS ADAPTER	37
6.6	ATTACHING A PLATE TO THE HARNESS ADAPTER	39
<b>7</b>	<b>OPERATOR INSTRUCTIONS</b>	
7.1	ADJUSTING THE ASSAULT HARNESS SHOULDER STRAPS	41

# CONTENTS

7.2	ADJUSTING THE SIDE STRAPS	42
7.3	OPTIONAL G-HOOK CONNECTION FOR THE SIDE STRAPS	43
<hr/>		
8	RECCE CONFIGURATION	
8.1	ATTACHING THE PLATE COVER TO THE HARNESS ADAPTER, THEN TO THE M4 JUMP FLAP	45
8.2	ATTACHING THE ASSAULT HARNESS TO THE ZIP-ON PACK, THEN TO THE ZIP-ON PACK ADAPTER	49
8.3	ATTACHING THE M4 JUMP FLAP AND THE HARNESS ADAPTER TO THE ASSAULT HARNESS	53
8.4	ATTACHING THE DROP GP POUCH 8X5 AND SIDE POUCHES TO THE RECCE CONFIGURATION	55
9	OPERATOR INSTRUCTIONS	
9.1	ADJUSTING THE ASSAULT HARNESS SHOULDER STRAPS AND SIDE STRAPS	57
9.2	OPTIONAL G-HOOK CONNECTION FOR THE SIDE STRAPS	59
<hr/>		
10	PACK CONFIGURATION	
10.1	ATTACHING THE ASSAULT HARNESS TO THE ZIP-ON PACK, THEN TO THE ZIP-ON PACK ADAPTER	61
10.2	ATTACHING THE STRAPS TO THE ZIP-ON PACK AND THE ASSAULT HARNESS	65
11	OPERATOR INSTRUCTIONS	
11.1	INSTALLING THE SIDE POUCHES	67
11.2	INSTALLING BALLISTIC PROTECTION	69
11.3	ADJUSTING THE SHOULDER STRAPS	70
<hr/>		
12	COMPONENT DESCRIPTIONS	
12.1	JPC R-SERIES™	71
12.2	JPC PADDED INSERT	72
12.3	ZIP-ON PACK ADAPTER	73
12.4	ZIP-ON PACK	74
12.5	ASSAULT HARNESS	75
12.6	2-BAND STRUCTURAL CUMMERBUND	76

# CONTENTS

12.7 3-BAND SKELETAL CUMMERBUND	77
12.8 3-BAND STRUCTURAL CUMMERBUND	78
12.9 HARNESS ADAPTER	79
12.10 M4 JUMP FLAP	80
12.11 DROP GP POUCH 8X5	81
12.12 RADIO POUCH	82
12.13 RADIO SIDE POUCH	83
12.13.1 G-HOOK CONNECTION TO M4 JUMP FLAP	84
12.14 M4 SIDE POUCH	85
12.15 PLATE COVER	86
12.16 SIDE MOLLE PANEL SET	87
12.17 M4 MAG RETAINER	88
12.18 SHOULDER PAD SET	89

---

13 CARE INSTRUCTIONS	90
----------------------	----



# 1 INTRODUCTION

## 1.1 DESIGN

---

The **R-SERIES™** is a highly tuned suite of load carriage innovations that strikes the nearly impossible balance between weight, durability, integration, modularity, versatility, and refinement. It was developed in collaboration with Special Operations Forces to address their unique and diverse requirements. With the **JPC R-SERIES™** at its core, the **R-SERIES™** addresses the warfighter's need to tailor the system to a constantly shifting mission profile.

## 1.2 FEATURES

---

- A truly modular system with mission specific scalability
- Updated cable management for current comms systems
- Designed to handle the heavier load carriage of today's warfighter
- Streamlined attachment methods keep gear closer to body
- Accommodates multiple plate sizes and configurations



JPC R-SERIES™



R-SERIES™ JPC  
PADDED INSERT



R-SERIES™ ZIP-ON  
PACK ADAPTER



R-SERIES™  
ZIP-ON PACK



R-SERIES™  
ASSAULT HARNESS



R-SERIES™ 2-BAND  
STRUCTURAL  
CUMMERBUND



R-SERIES™ 3-BAND  
SKELETAL  
CUMMERBUND




R-SERIES™ 3-BAND  
STRUCTURAL  
CUMMERBUND



R-SERIES™  
HARNESS ADAPTER



R-SERIES™  
M4 JUMP FLAP



R-SERIES™ DROP  
GP POUCH 8X5



R-SERIES™  
RADIO POUCH



R-SERIES™  
RADIO SIDE POUCH




R-SERIES™  
M4 SIDE POUCH



R-SERIES™  
PLATE COVER



R-SERIES™  
SIDE MOLLE  
PANEL SET



R-SERIES™  
M4 MAG RETAINER



R-SERIES™  
SHOULDER PAD SET

# 3 CONFIGURATIONS



R-SERIES™ ASSAULT CONFIGURATION



R-SERIES™ JUMP CONFIGURATION



R-SERIES™ RECCE CONFIGURATION



R-SERIES™ PACK CONFIGURATION

# 4 R-SERIES™ ASSAULT CONFIGURATION

## 4 ASSAULT CONFIGURATION

4.1	INSTALLING THE JPC PADDED INSERT	05
4.2	INSTALLING AND ADJUSTING THE CUMMERBUND	06
4.3	ATTACHING THE M4 JUMP FLAP	08
4.4	INSTALLING THE DROP GP POUCH 8X5	10
4.5	ATTACHING THE ZIP-ON PACK	12
4.6	INSTALLING THE SIDE POUCHES	14
4.7	INSTALLING THE SIDE MOLLE PANEL SET	16


## 5 OPERATOR INSTRUCTIONS

5.1	INSTALLING BALLISTIC PROTECTION	18
5.2	ADJUSTING THE RIDE HEIGHT (SHOULDER STRAPS)	20
5.3	ADJUSTING THE SHOULDER E-DOFF CORD	21

5.4	EMERGENCY DOFFING PROCEDURE	24
5.5	EMERGENCY DOFFING PROCEDURE	25
5.6	INSTALLING AND ATTACHING SINGLE STRAPS	26



JPC R-SERIES™



R-SERIES™ 2-BAND STRUCTURAL CUMMERBUND



R-SERIES™ 3-BAND STRUCTURAL CUMMERBUND



R-SERIES™ 3-BAND SKELETAL CUMMERBUND



R-SERIES™ M4 JUMP FLAP




R-SERIES™ ZIP-ON PACK



R-SERIES™ JPC PADDED INSERT



R-SERIES™ DROP GP POUCH 8X5



R-SERIES™ RADIO POUCH



R-SERIES™ RADIO SIDE POUCH



R-SERIES™ M4 SIDE POUCH



R-SERIES™ SIDE MOLLE PANEL SET



R-SERIES™ M4 MAG RETAINER



R-SERIES™ SHOULDER PAD SET



## 4.1 INSTALLING THE R-SERIES™ JPC PADDED INSERT

4.1

05

### COMPONENTS



JPC R-SERIES™



R-SERIES™ JPC  
PADDED INSERT



1  
Open bottom front or rear flap and insert pad up into pocket at top inside of carrier.



2  
Insert pad into slot at bottom edge.

## 4.2 INSTALLING AND ADJUSTING THE R-SERIES™ SKELETAL OR STRUCTURAL CUMMERBUND


4.2

06

### COMPONENTS



JPC R-SERIES™



R-SERIES™ 3-BAND  
STRUCTURAL CUMMERBUND




1 Insert the **R-SERIES™ CUMMERBUND** ends through the openings behind the webbing and zipper.



2 Place the carrier on the body with plates inserted. Close the front of the cummerbund on the front of the plate carrier and pull or press the side of the cummerbund to a comfortable position.

## 4.2 INSTALLING AND ADJUSTING THE R-SERIES™ SKELETAL OR STRUCTURAL CUMMERBUND

3

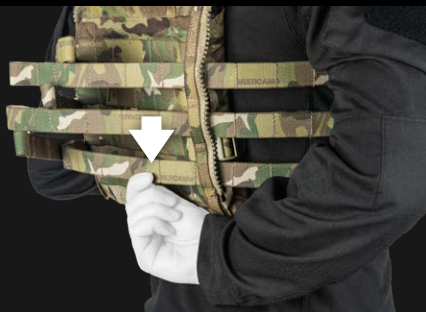

Take note where the cummerbund is on the side/back and remove carrier.

4



Place the carrier back flat.

5



Using the nylon shock cord, weave together ends of the **R-SERIES™ STRUCTURAL CUMMERBUND** through webbing on **JPC R-SERIES™**.

6




Once the shock cord has been installed the ends can be secured using the shock cord retainer. Route each end of the shock cord through the hole in the retainer, trim and burn ends.

## 4.3 ATTACHING THE R-SERIES™ M4 JUMP FLAP TO THE JPC R-SERIES™

### COMPONENTS



JPC R-SERIES™



R-SERIES™ M4 JUMP FLAP

1



To remove side buckle, squeeze top webbing and slide through buckle slot.

2





## 4.3 ATTACHING THE R-SERIES™ M4 JUMP FLAP TO THE JPC R-SERIES™

4.3 09

3



Route all four attachment straps through the webbing slots above the slip pocket on the front platebags. Pull the straps down until the top of the panel is at the top of the slots.

4



Open the slip pocket on the plate bag and lay the panel attachment straps down flat inside the pocket.

5




## 4.4 INSTALLING THE R-SERIES™ DROP GP POUCH 8X5

### COMPONENTS



JPC R-SERIES™



R-SERIES™ DROP GP POUCH

1



2



Open slip pocket on flap.

## 4.4 INSTALLING THE R-SERIES™ DROP GP POUCH 8X5

4.4

11

3




Insert pouch top.

## 4.5 ATTACHING THE R-SERIES™ ZIP-ON PACK TO THE JPC R-SERIES™

### COMPONENTS



JPC R-SERIES™



R-SERIES™ ZIP ON PACK

1



Weave top straps on pack through MOLLE webbing on vest.

2



## 4.5 ATTACHING THE R-SERIES™ ZIP ON PACK TO THE JPC R-SERIES™



Secure strap ends inside the pack.



Connect side zippers.



Secure bottom straps through Molle on vest.



Secure snaps.

## 4.6 INSTALLING THE R-SERIES™ SIDE POUCHES


4.6

14


### COMPONENTS



JPC R-SERIES™



R-SERIES™ RADIO  
SIDE POUCH



R-SERIES™ M4  
SIDE POUCH



Open side Velcro® slot. Insert Velcro® lip on pouch.

## 4.6 INSTALLING THE R-SERIES™ SIDE POUCHES

4.6 15




## 4.7 INSTALLING THE R-SERIES™ SIDE MOLLE PANEL SET

### COMPONENTS



JPC R-SERIES™




R-SERIES™ SIDE  
MOLLE PANEL SET

1



Open side Velcro® slot.

2

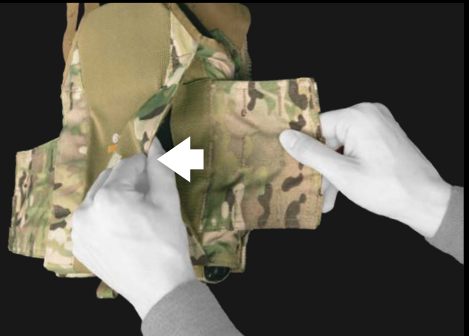

Insert Velcro® lip on pouch.



## 4.7 INSTALLING THE R-SERIES™ SIDE MOLLE PANEL SET

3



Push down to secure.

## COMPONENTS



JPC R-SERIES™



PLATE



1 Open the carrier along bottom edge of the interior side and locate the plate pocket. Install the ballistic plate with the concave side of the plate facing the body.



2 Secure plate into position by closing bottom edge of the carrier.

## 5.1 INSTALLING BALLISTIC PROTECTION



3 Repeat process for the front plate bag. Keep in mind that the concave side of the plate should be facing towards the body when the vest is worn.



4 Secure plate into position by closing bottom edge of the carrier.

## 5.2 ADJUSTING THE R-SERIES™ JPC RIDE HEIGHT (SHOULDER STRAPS)

### COMPONENTS



JPC R-SERIES™

1



Lay carrier flat and open shoulder cover.


2




Shorten or lengthen by moving top strap forward or backward.

## 5.3 ADJUSTING THE JPC R-SERIES™ SHOULDER E-DOFF CORD


### COMPONENTS



JPC R-SERIES™

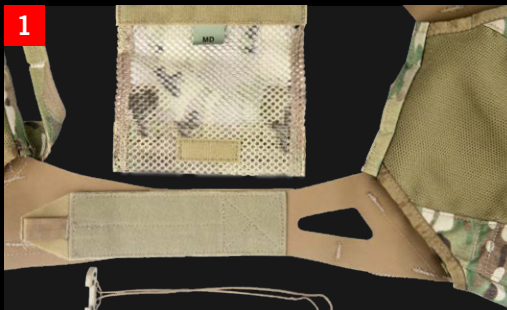

Lay the carrier face down with shoulder cover removed and untie knot.

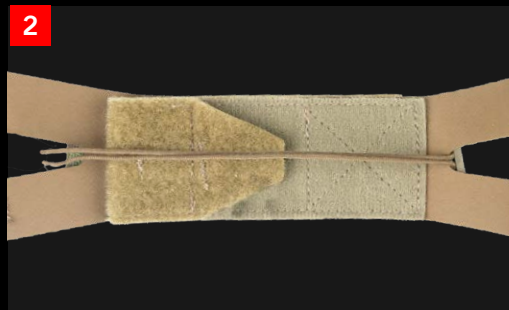

Seat toggle in corner of shoulder and take up slack.

## 5.3 ADJUSTING THE JPC R-SERIES™ SHOULDER E-DOFF CORD

3




Tie the ends with a figure 8 knot.

4




Girth hitch through webbing loop  
at end of front shoulder.

5

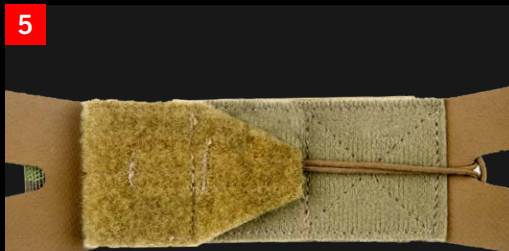

Place toggle back in corner of shoulder.

6

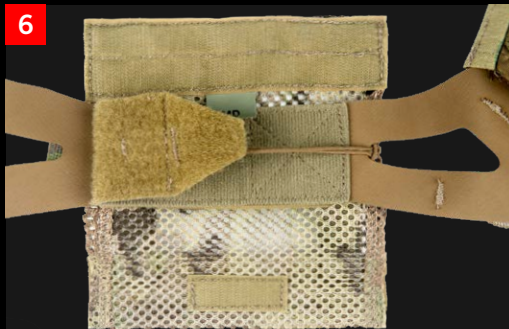

Re-attach shoulder cover.

## 5.3 ADJUSTING THE JPC R-SERIES™ SHOULDER E-DOFF CORD



## 5.4 EMERGENCY DOFFING PROCEDURE

5.4

24

### COMPONENTS



JPC R-SERIES™

1



Grab the R-SERIES™ 3-BAND  
STRUCTURAL CUMMERBUND.

2



Pull out and away.



## 5.5 EMERGENCY DOFFING PROCEDURE

5.5

25

### COMPONENTS



JPC R-SERIES™



Grab the toggles on the **R-SERIES™ JPC** on one or both shoulder straps.



Pull straps.

## 5.6 INSTALLING AND ATTACHING SINGLE STRAPS TO THE JPC R-SERIES™

### COMPONENTS



JPC R-SERIES™



1 Insert the non hook end of the single strap and feed through the side buckle of the R-SERIES™ JPC.

2 Attach the hook on the strap to the loop panel on the carrier. Pull the strap ends forward to adjust. Use the rear buckles to release tension.

# 6 R-SERIES™ JUMP CONFIGURATION

## 6 JUMP CONFIGURATION

- 6.1 ATTACHING THE HARNESS ADAPTER TO THE M4 JUMP FLAP ..... 28
- 6.2 ATTACHING THE M4 JUMP FLAP TO THE ASSAULT HARNESS ..... 31
- 6.3 INSTALLING THE DROP GP POUCH 8X5 ..... 33
- 6.4 INSTALLING THE SIDE MOLLE PANEL SET OR SIDE POUCHES ..... 35
- 6.5 ATTACHING THE M4 MAG RETAINER TO THE HARNESS ADAPTER ..... 37
- 6.6 ATTACHING A PLATE TO THE HARNESS ADAPTER ..... 39


## 7 OPERATOR INSTRUCTIONS

- 7.1 ADJUSTING THE ASSAULT HARNESS SHOULDER STRAPS ..... 41
- 7.2 ADJUSTING THE SIDE STRAPS ..... 42
- 7.3 OPTIONAL G-HOOK CONNECTION FOR THE SIDE STRAPS ..... 43




## 6.1 ATTACHING R-SERIES™ HARNESS ADAPTER TO R-SERIES™ M4 JUMP FLAP

### COMPONENTS



R-SERIES™ M4 JUMP FLAP



R-SERIES™ HARNESS ADAPTER

1



R-SERIES™ M4 JUMP FLAP buckles.

2



To install side buckles squeeze top webbing and slide through buckle slot.

## 6.1 ATTACHING THE R-SERIES™ HARNESS ADAPTER TO THE R-SERIES™ M4 JUMP FLAP



Lay the R-SERIES™ M4 JUMP FLAP face up and pull straps away from the back of the flap. Lay R-SERIES™ HARNESS ADAPTER face (loop side) down.



Route end straps through female buckle.



Squeeze tips of R-SERIES™ M4 JUMP FLAP straps together, route under webbing and through slots of the harness adapter.



Pull R-SERIES™ M4 JUMP FLAP straps through the slots on the R-SERIES™ HARNESS ADAPTER.

## 6.1 ATTACHING R-SERIES™ HARNESS ADAPTER TO R-SERIES™ M4 JUMP FLAP

7




Secure **R-SERIES™ M4 JUMP FLAP** straps to the back of the **R-SERIES™ HARNESS ADAPTER**.

8




## 6.2 ATTACHING THE R-SERIES™ M4 JUMP FLAP TO THE R-SERIES™ ASSAULT HARNESS

### COMPONENTS




R-SERIES™  
ASSAULT HARNESS



R-SERIES™ M4  
JUMP FLAP

1

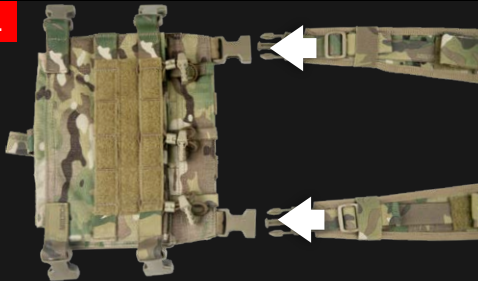

Attach front buckles on **R-SERIES™ ASSAULT HARNESS** to top buckles of **R-SERIES™ M4 JUMP FLAP**.

2



Attach bottom straps on **R-SERIES™ ASSAULT HARNESS** to top side buckles on **R-SERIES™ M4 JUMP FLAP**.

## 6.2 ATTACHING THE R-SERIES™ M4 JUMP FLAP TO THE R-SERIES™ ASSAULT HARNESS

3



Attach the R-SERIES™ ASSAULT HARNESS strap to the R-SERIES™ M4 JUMP FLAP bottom buckles.

4



5






## 6.3 INSTALLING THE R-SERIES™ DROP GP POUCH 8X5


6.3

33

### COMPONENTS



R-SERIES™ M4 JUMP FLAP



R-SERIES™ DROP GP POUCH

1



2



Open slit pocket on flap and insert pouch top.

## 6.3 INSTALLING THE R-SERIES™ DROP GP POUCH 8X5

6.3

34

3



Press down to secure.


◀ BACK TO CONTENTS




◀ JUMP CONFIGURATION

## 6.4 INSTALLING THE R-SERIES™ SIDE MOLLE PANEL SET OR SIDE POUCHES


### COMPONENTS




R-SERIES™ M4 JUMP FLAP



R-SERIES™ SIDE  
MOLLE PANEL SET



R-SERIES™  
RADIO SIDE  
POUCH



R-SERIES™ M4  
SIDE POUCH

1



To attach the R-SERIES™ MOLLE PANEL SET lay flap flat and orientate the panels as shown.

2



Lift the flap and align the Velcro® lip on panel. Press down firmly.

## 6.4 INSTALLING THE R-SERIES™ SIDE MOLLE PANEL SET OR SIDE POUCHES

3




Close flap to secure.

## 6.5 ATTACHING THE R-SERIES™ M4 MAG RETAINER TO THE R-SERIES™ HARNESS ADAPTER

6.5 37

### COMPONENTS



R-SERIES™ HARNESS ADAPTER



R-SERIES™ M4 MAG RETAINER

1



Lay the R-SERIES™ M4 JUMP FLAP face up and insert the R-SERIES™ M4 MAG RETAINER into front pocket.

2



## 6.5 ATTACHING THE R-SERIES™ M4 MAG RETAINER TO THE R-SERIES™ HARNESS ADAPTER

6.5

38

3




4



## 6.6 ATTACHING A PLATE TO THE R-SERIES™ HARNESS ADAPTER

### COMPONENTS




R-SERIES™ HARNESS ADAPTER



PLATE

1

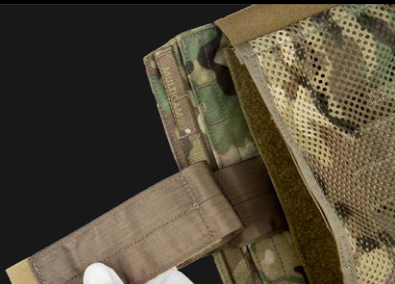

Open inside top and bottom flap of mesh pocket on the back side of the **R-SERIES™ HARNESS ADAPTER** and pull out retention strap from pocket.


2



## 6.6 ATTACHING A PLATE TO THE R-SERIES™ HARNESS ADAPTER



Insert plate.

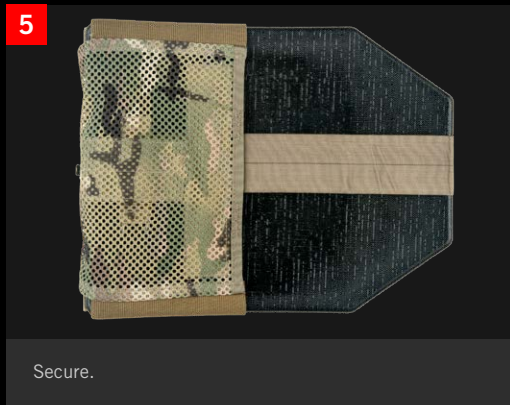


Secure.





## 7.1 ADJUSTING THE R-SERIES™ ASSAULT HARNESS SHOULDER STRAPS

### COMPONENTS



R-SERIES™ ASSAULT HARNESS




To lengthen or shorten the shoulder straps, pull back the tab of the **R-SERIES™ ASSAULT HARNESS** strap and adjust to the desired position.




Secure strap by pressing strap tab down firmly.

### COMPONENTS



R-SERIES™ ASSAULT HARNESS



R-SERIES™ M4 JUMP FLAP

1



The R-SERIES™ ASSAULT HARNESS side strap can be adjusted by sliding the webbing ends in or out through the slider. To

2



To shorten, pull webbing ends in through the slider.

## 7.3 OPTIONAL G-HOOK CONNECTION FOR THE SIDE STRAPS



For a more low profile setup when using the **R-SERIES™ RADIO SIDE POUCH**, replace the side buckles with the supplied **G-HOOKS**.

# 8 R-SERIES™ RECCE CONFIGURATION

## 8 RECCE CONFIGURATION

- 8.1 ATTACHING THE PLATE COVER TO THE HARNESS ADAPTER, THEN TO THE M4 JUMP FLAP ————— 45
- 8.2 ATTACHING THE ASSAULT HARNESS TO THE ZIP-ON PACK, THEN TO THE ZIP-ON PACK ADAPTER ————— 49
- 8.3 ATTACHING THE M4 JUMP FLAP AND THE HARNESS ADAPTER TO THE ASSAULT HARNESS ————— 53
- 8.4 ATTACHING THE DROP GP POUCH 8X5 AND SIDE POUCHES TO THE RECCE CONFIGURATION ————— 55


## 9 OPERATOR INSTRUCTIONS

- 9.1 ADJUSTING THE ASSAULT HARNESS SHOULDER STRAPS AND SIDE STRAPS ————— 57
- 9.2 OPTIONAL G-HOOK CONNECTION FOR THE SIDE STRAPS ————— 59



## 8.1 ATTACHING THE R-SERIES™ PLATE COVER TO THE R-SERIES™ HARNESS ADAPTER, THEN TO THE R-SERIES™ M4 JUMP FLAP


### COMPONENTS



R-SERIES™ PLATE COVER




R-SERIES™ HARNESS ADAPTER



R-SERIES™ M4 JUMP FLAP

1



R-SERIES™ M4 JUMP FLAP buckles.

2



To install side buckles squeeze top webbing and slide through buckle slot.

## 8.1 ATTACHING THE R-SERIES™ PLATE COVER TO THE R-SERIES™ HARNESS ADAPTER, THEN TO THE R-SERIES™ M4 JUMP FLAP

3



Place the **R-SERIES™ PLATE COVER** front to loop inside **R-SERIES™ HARNESS ADAPTER**.

4



Place back side of **R-SERIES™ PLATE COVER** to inside mesh pouch.

5



Lay the **R-SERIES™ M4 JUMP FLAP** face up and pull straps away from the back of the flap. Lay **R-SERIES™ HARNESS ADAPTER** face (loop side) down.

6



Route end straps through female buckle.

## 8.1 ATTACHING THE R-SERIES™ PLATE COVER TO THE R-SERIES™ HARNESS ADAPTER, THEN TO THE R-SERIES™ M4 JUMP FLAP



Squeeze tips of **R-SERIES™ M4 JUMP FLAP** straps together, route under webbing and through slots of the harness adapter.



Pull **R-SERIES™ M4 JUMP FLAP** straps through the slots on the **R-SERIES™ HARNESS ADAPTER**.



Secure **R-SERIES™ M4 JUMP FLAP** straps to the back of the **R-SERIES™ HARNESS ADAPTER**.



## 8.1 ATTACHING THE R-SERIES™ PLATE COVER TO THE R-SERIES™ HARNESS ADAPTER, THEN TO THE R-SERIES™ M4 JUMP FLAP

11



Insert plate.

12



Secure bottom flap.

13




Secure bottom flap.




## 8.2 ATTACHING THE R-SERIES™ ASSAULT HARNESS TO THE R-SERIES™ ZIP-ON PACK, THEN TO THE R-SERIES™ ZIP-ON PACK ADAPTER


### COMPONENTS



R-SERIES™  
ASSAULT HARNESS



R-SERIES™ ZIP-ON PACK



R-SERIES™ ZIP-ON  
PACK ADAPTER

1



Pull back the tab of the **R-SERIES™ ASSAULT HARNESS** strap and route through the metal D ring on the **R-SERIES™ ZIP-ON PACK**.

2



Secure strap by pressing strap tab down firmly.

## 8.2 ATTACHING THE R-SERIES™ ASSAULT HARNESS TO THE R-SERIES™ ZIP-ON PACK, THEN TO THE R-SERIES™ ZIP-ON PACK ADAPTER

3



Route **R-SERIES™ ZIP-ON PACK** straps through webbing on back of **R-SERIES™ ASSAULT HARNESS**.

4



Continue routing **R-SERIES™ ZIP-ON PACK** straps through webbing on back of **R-SERIES™ ASSAULT HARNESS**.

5




Continue routing **R-SERIES™ ZIP-ON PACK** straps through webbing on back of **R-SERIES™ ASSAULT HARNESS**.

6



Route the **R-SERIES™ ZIP-ON PACK** tabs back through slots.

## 8.2 ATTACHING THE R-SERIES™ ASSAULT HARNESS TO THE R-SERIES™ ZIP-ON PACK, THEN TO THE R-SERIES™ ZIP-ON PACK ADAPTER

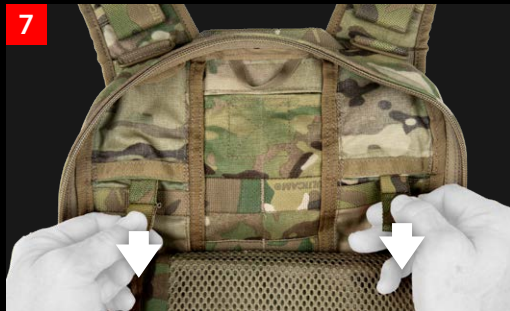

Pull tabs on inside of **R-SERIES™ ZIP-ON PACK**.



Secure tabs on inside of **R-SERIES™ ZIP-ON PACK**.



Place bottom lip of **R-SERIES™ ZIP-ON PACK ADAPTER** into bottom slot of pack.



## 8.2 ATTACHING THE R-SERIES™ ASSAULT HARNESS TO THE R-SERIES™ ZIP-ON PACK, THEN TO THE R-SERIES™ ZIP-ON PACK ADAPTER



11

Secure.



12

Insert top Velcro® lip into top slot on **R-SERIES™ ZIP-ON PACK** tabs back through slots.



13

Secure.




14


Zip Right/Left sides of zipper to **R-SERIES™ ZIP-ON PACK**.

## 8.3 ATTACHING THE R-SERIES™ M4 JUMP FLAP AND THE R-SERIES™ HARNESS ADAPTER TO THE R-SERIES™ ASSAULT HARNESS

### COMPONENTS



R-SERIES™ M4 JUMP FLAP AND R-SERIES™ HARNESS ADAPTER



R-SERIES™ ASSAULT HARNESS AND R-SERIES™ ZIP-ON PACK

1



Attach front buckles on **R-SERIES™ ASSAULT HARNESS** to top buckles of **R-SERIES™ M4 JUMP FLAP**.

2



Attach bottom straps on **R-SERIES™ ASSAULT HARNESS** to top side buckles on **R-SERIES™ M4 JUMP FLAP**.

## 8.3 ATTACHING THE R-SERIES™ M4 JUMP FLAP AND THE R-SERIES™ HARNESS ADAPTER TO THE R-SERIES™ ASSAULT HARNESS

3




Attach the **R-SERIES™ ASSAULT HARNESS** strap to the **R-SERIES™ M4 JUMP FLAP** bottom buckles.

4




## 8.4 ATTACHING THE R-SERIES™ DROP GP POUCH 8X5 AND SIDE POUCHES TO THE R-SERIES™ RECCE CONFIGURATION

### COMPONENTS



R-SERIES™ M4 JUMP FLAP



R-SERIES™ ZIP-ON  
PACK ADAPTER

1



Open the R-SERIES™ M4 JUMP FLAP slip pocket and insert the RSR™ DROP GP POUCH.

2



Press down and secure.



## 8.4 ATTACHING THE R-SERIES™ DROP GP POUCH 8X5 AND SIDE POUCHES TO THE R-SERIES™ RECCE CONFIGURATION



**3** **SIDE ATTACHMENT POINT:** Open the side Velcro® slot on the R-SERIES™ HARNESS ADAPTER.




**4** Insert the Velcro® lip on side pouch and secure.



# 9.1 ADJUSTING THE R-SERIES™ ASSAULT HARNESS SHOULDERS TRAPS AND SIDE STRAPS

## COMPONENTS



R-SERIES™ ASSAULT HARNESS

1



To lengthen or shorten the shoulder straps pull back the tab of the **R-SERIES™ ASSAULT HARNESS** strap and adjust to the desired position.

2



Secure strap by pressing strap tab down firmly.

## 9.1 ADJUSTING THE R-SERIES™ ASSAULT HARNESS SHOULDER STRAPS AND SIDE STRAPS

9.1

58

3



The lower side strap can be adjusted at the metal D ring attachment point of the R-SERIES™ ZIP-ON PACK.

4



Further adjustments can be made at the side buckle end of the lower strap by pulling the webbing end in or out of the slider.

## 9.2 OPTIONAL G-HOOK CONNECTION FOR THE SIDE STRAPS



For a more low profile setup when using the **R-SERIES™ RADIO SIDE POUCH**, replace the side buckles with the supplied **G-HOOKS**.

# 10 R-SERIES™ PACK CONFIGURATION

## 10 PACK CONFIGURATION

- 10.1 ATTACHING THE ASSAULT HARNESS TO THE ZIP-ON PACK, THEN TO THE ZIP-ON PACK ADAPTER ————— 61
- 10.2 ATTACHING THE STRAPS TO THE ZIP-ON PACK AND THE ASSAULT HARNESS ————— 65

## 11 OPERATOR INSTRUCTIONS

- 11.1 INSTALLING THE SIDE POUCHES ————— 67
- 11.2 INSTALLING BALLISTIC PROTECTION ————— 69
- 11.3 ADJUSTING THE SHOULDER STRAPS ————— 70



R-SERIES™  
ASSAULT HARNESS



R-SERIES™  
ZIP-ON PACK



R-SERIES™ ZIP-ON  
PACK ADAPTER



R-SERIES™  
RADIO POUCH



R-SERIES™  
RADIO SIDE POUCH



R-SERIES™  
M4 SIDE POUCH



R-SERIES™ JPC  
PADDED INSERT



R-SERIES™ DROP  
GP POUCH 8X5




R-SERIES™  
SIDE MOLLE  
PANEL SET




## 10.1 ATTACHING THE R-SERIES™ ASSAULT HARNESS TO THE R-SERIES™ ZIP-ON PACK, THEN TO THE R-SERIES™ ZIP-ON PACK ADAPTER


### COMPONENTS



R-SERIES™  
ASSAULT HARNESS



R-SERIES™ ZIP-ON PACK



R-SERIES™ ZIP-ON  
PACK ADAPTER

1



Pull back the tab of **R-SERIES™ ASSAULT HARNESS** strap and route through the metal D ring on the **R-SERIES™ ZIP-ON PACK**.

2



Secure strap by pressing strap tab down firmly.

## 10.1 ATTACHING THE R-SERIES™ ASSAULT HARNESS TO THE R-SERIES™ ZIP-ON PACK, THEN TO THE R-SERIES™ ZIP-ON PACK ADAPTER

3



Route **R-SERIES™ ZIP-ON PACK** straps through webbing on back of **R-SERIES™ ASSAULT HARNESS**.

4



Continue routing **R-SERIES™ ZIP-ON PACK** straps through webbing on back of **R-SERIES™ ASSAULT HARNESS**.

5




Continue routing **R-SERIES™ ZIP-ON PACK** straps through webbing on back of **R-SERIES™ ASSAULT HARNESS**.

6



Route the **R-SERIES™ ZIP-ON PACK** tabs back through slots.

## 10.1 ATTACHING THE R-SERIES™ ASSAULT HARNESS TO THE R-SERIES™ ZIP-ON PACK, THEN TO THE R-SERIES™ ZIP-ON PACK ADAPTER

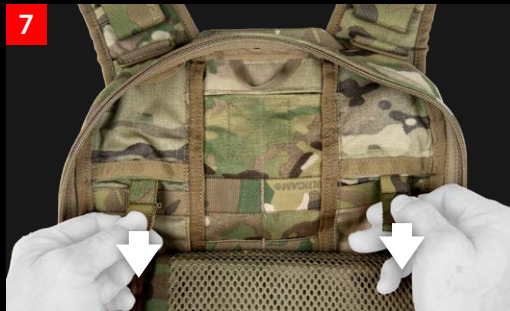

Pull tabs on inside of R-SERIES™ ZIP-ON PACK.



Secure tabs on inside of R-SERIES™ ZIP-ON PACK.



Place bottom lip of R-SERIES™ ZIP-ON PACK ADAPTER into bottom slot of pack.





## 10.1 ATTACHING THE R-SERIES™ ASSAULT HARNESS TO THE R-SERIES™ ZIP-ON PACK, THEN TO THE R-SERIES™ ZIP-ON PACK ADAPTER



11

Secure.



12

Insert top Velcro® lip into top slot on **R-SERIES™ ZIP-ON PACK** tabs back through slots.



13

Secure.




14

Zip Right/Left sides of zipper to **R-SERIES™ ZIP-ON PACK**.




## 10.2 ATTACHING THE STRAPS TO THE R-SERIES™ ZIP-ON PACK AND THE R-SERIES™ ASSAULT HARNESS

### COMPONENTS



R-SERIES™ ZIP-ON PACK



R-SERIES™  
ASSAULT HARNESS

1



To attach the supplied sternum strap, release the webbing end of the **R-SERIES™ ASSAULT HARNESS** through slider and route through the slider end of the sternum strap.

2



Reroute the webbing end of the **R-SERIES™ ASSAULT HARNESS** through slider to secure.

## 10.2 ATTACHING THE STRAPS TO THE R-SERIES™ ZIP-ON PACK AND THE R-SERIES™ ASSAULT HARNESS



Route lower side strap through the lower metal D ring attachment point of the R-SERIES™ ZIP-ON PACK.



Route the webbing end through the slider.




Adjust to desired length and secure webbing ends under elastic bands.




For final assembly, connect side strap buckle to the R-SERIES™ ASSAULT HARNESS buckle end.

# 11.1 INSTALLING THE SIDE POUCHES

## COMPONENTS



R-SERIES™ ZIP-ON PACK



R-SERIES™ M4  
SIDE POUCH



R-SERIES™ SIDE  
MOLLE PANEL SET

1



Open side Velcro® slot.

2



Insert Velcro® lip on pouch.

## 11.1 INSTALLING THE SIDE POUCHES

11.1


68

3



Push down to secure.

### COMPONENTS



R-SERIES™ ZIP-ON PACK



PLATE

1




To install a ballistic plate, open the plate strap webbing and insert plate into the pocket with the concave side of the plate facing the body.

2



Secure plate by pulling plate strap webbing over plate and securing the Velcro® connection.

## COMPONENTS



R-SERIES™ ASSAULT HARNESS

1



To lengthen or shorten the shoulder straps, pull back the tab of the **R-SERIES™ ASSAULT HARNESS** strap and adjust to the desired position.

2



Secure strap by pressing strap tab down firmly.

## 12 COMPONENT DESCRIPTIONS

### 12.1 JPC R-SERIES™



The **JPC R-SERIES™** continues the tradition of being a lightweight, minimal armor carrier designed for maximum mobility, weight savings, packability and comfort. Built for added load and support, the **JPC R-SERIES™** allows for maximum capability of carrying and concealing radios and communication cables. Front channelized Velcro® slot allows for use with the structural cummerbunds which supports heavier loads and can be used with our **AVS™ STKSS™ STRUCTURAL SUPPORT SYSTEM**. Interior slots on the inside front and back of the carrier add additional capability for load carriage options keeping the system as low profile as possible. The **JPC R-SERIES™** is compatible with a host of accessories that allow the user to customize the plate carrier according to their mission specific needs. Made in the US from US materials.

#### COLORS




MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-099

## 12.2 R-SERIES™ JPC PADDED INSERT

12.2 / 72



The **R-SERIES™ JPC PADDED INSERT** provides additional comfort for the **JPC R-SERIES™** vest. The design of the insert addresses pressure points sometimes felt when wearing plates. This lightweight padded layer alleviates those pressure points and reduces fatigue. The insert's shape was designed to protect the spine while also protecting the sternum when worn in the front. Can be worn in the front, back or both. Made in the US from US materials.

### COLORS



BLACK

RSR-108





The **R-SERIES™ ZIP-ON PACK ADAPTER** converts the **R-SERIES™ ZIP-ON PACK** into a backpack when used with the **R-SERIES™ ASSAULT HARNESS**. In the RECCE configuration it can be turned into a minimized plate carrier system. Padded sides and center mesh back allow for maximum breathability and comfort. VELCRO® side connection system allows user to connect all **JR-SERIES™ SIDE POUCHES** to the back. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-112

## 12.4 R-SERIES™ ZIP-ON PACK

12.4

74



The **R-SERIES™ ZIP-ON PACK** is the latest in load carriage versatility and modularity. Multiple attachment points allow for conversion into several different configurations including JUMP, RECCE and the standalone PACK. An inside pocket with plate retention straps allows user to carry a ballistic plate along with a radio and hydration bladder. Multiple comm ports on the inside allow for routing comm cables without causing snag hazards. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-ZP6

## 12.5 R-SERIES™ ASSAULT HARNESS

12.5 75



The **R-SERIES™ ASSAULT HARNESS** brings a new level of modularity to the **R-SERIES™** system. With numerous attachment points and ease of adjustment, the **R-SERIES™ ASSAULT HARNESS** allows for multiple configurations. Compatibility with **R-SERIES™ ZIP-ON PACK** and **HARNESS ADAPTER** allows operator to configure a modular minimalist plate carrier system. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-104

## 12.6 R-SERIES™ 2-BAND STRUCTURAL CUMMERBUND



The **R-SERIES™ 2-BAND STRUCTURAL CUMMERBUND** is designed with load carriage in mind. It provides rigidity and structure for supporting vest systems with **STKSS™**. It offers two rows of **MOLLE** for mounting pouches on the inside or outside and can be used with **AVS™ POUCHES**, **SPT™** and **JPC R-SERIES™** vests. Small low profile shock cord retainers help keep the attachment in the rear clear of snag hazards. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-102

## 12.7 R-SERIES™ 3-BAND SKELETAL CUMMERBUND

12.7

77



The **R-SERIES™ 3-BAND SKELETAL CUMMERBUND** provides rigidity and structure for supporting equipment on the side of vests while still offering flexibility. It offers two rows of **MOLLE** for mounting pouches on the inside or outside and can be used with **AVS™ POUCHES**, **SPC™** and **JPC R-SERIES™** vests. Small low profile shock cord retainers help keep the attachment in the rear clear of snag hazards. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-122

## 12.8 R-SERIES™ 3-BAND STRUCTURAL CUMMERBUND



The **R-SERIES™ 3-BAND STRUCTURAL CUMMERBUND** is designed with load carriage in mind. It provides rigidity and structure for supporting vest systems with **STKSS™**. It offers three rows of **MOLLE** for mounting pouches on the inside or outside and can be used with **AVS™ POUCHES**, **AVS™**, **SPC™** and **JPC R-SERIES™** vests. Small low profile shock cord retainers help keep the attachment in the rear clear of snag hazards. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-106

## 12.9 R-SERIES™ HARNESS ADAPTER

12.9

79



The **R-SERIES™ HARNESS ADAPTER** is the base component for several configurations making this system truly adaptable. The outside front accepts any detachable flap. The inside stretch pocket can quickly fit a size appropriate plate using either the 2" retainer strap that is built in or 3 additional M4 mags with the **R-SERIES™ M4 MAG RETAINER**. The rear is also compatible with the **R-SERIES™ PLATE COVER** so the system can be turned into a lightweight minimal plate carrier with the **R-SERIES™ ASSAULT HARNESS**. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE




BLACK

RSR-100

## 12.10 R-SERIES™ M4 JUMP FLAP

12.10

80

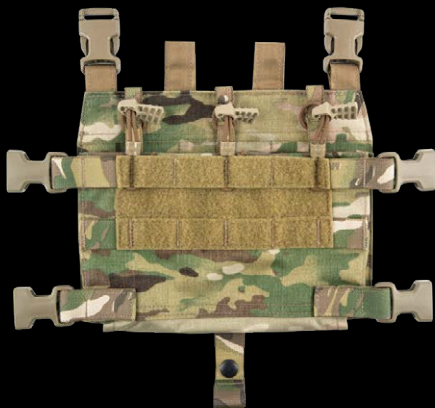

The **R-SERIES™ M4 JUMP FLAP** adds a new level of versatility in a detachable flap. In its base form, it is a streamlined flap design that holds three 30 round M4 magazines with side loops for a secure closure. The bottom slip pocket provides an area for storing sensitive items or allows for Velcro® side pouches compatible with the **JPC R-SERIES™** to be used as well. However, with the addition of the **R-SERIES™ ASSAULT HARNESS** and **HARNESS ADAPTER** the wearer now has a lightweight JUMP configuration chest rig. Then, add the **R-SERIES™ ZIP-ON PACK ADAPTER** and **PACK** and it is transformed to the lightweight RECCE configuration plate carrier. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK


RSR-DF7



## 12.11 R-SERIES™ DROP GP POUCH 8X5

12.11

81

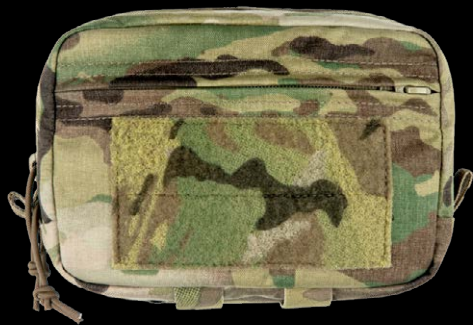

The R-SERIES™ DROP GP POUCH 8X5 is a versatile, easy access general purpose pouch measuring 8 x 5 x 2.5 inches. Loop panels on the inside provide a surface for mounting a variety of items. Top flap allows a secure connection to vest and tucks into a low-profile back pocket when used on a belt. Bottom 1" elastic provides an area for securing quick access to tourniquet. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-117

## 12.12 R-SERIES™ RADIO POUCH

12.12

82



The **R-SERIES™ RADIO POUCH** combines all the great features as the **R-SERIES™ RADIO SIDE POUCH** with the ability to attach to PALs type platforms. Front 3/4" side release buckle with Velcro® allows for quick and easy change of battery without having to take the radio out of the pouch. Minimized front connection will allow for maximum cooling of radio. Fits PRC 163,152 and 148 radios. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-113

## 12.13 R-SERIES™ RADIO SIDE POUCH

12.13

83



The R-SERIES™ RADIO SIDE POUCH brings a new level of comfort when carrying a radio. The Velcro®-in side attachment system allows for a secure, streamlined fit to the vest. An ambidextrous design allows the user to place the pouch on the right or left, front or back. Front ¾" side release buckle with Velcro® allow for quick and easy change of battery without having to take the radio out of the pouch. Minimized front connection will allow for maximum cooling of radio. Fits PRC 163,152 and 148 radios. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-101

## 12.13.1 G-HOOK CONNECTION TO M4 JUMP FLAP

12.13.1

84



For a more low profile setup when using the **R-SERIES™ RADIO SIDE POUCH** replace the side buckles with the supplied **G-HOOKS**.

## 12.14 R-SERIES™ M4 SIDE POUCH

12.14

85



The **R-SERIES™ M4 SIDE POUCH** is a unique take on the traditional mag pouch. It first addresses the attachment method by allowing one to quickly affix the pouch to the front of a plate carrier. The pouch can easily be modified to accommodate right or left-handed shooters due to its ambidextrous design. The updated hardware creates positive grip and cord retention for fast mag changes. The adjustable strap can be raised or lowered to set the desired magazine depth in the pouch. The pouch's pre-molded shape makes inserting magazines easier. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-103

## 12.15 R-SERIES™ PLATE COVER

12.15

86



The **R-SERIES™ PLATE COVER** is a lightweight plate topper that is used with the **R-SERIES™ HARNESS ADAPTER** to convert your JUMP configuration chest rig into a lightweight, low-profile minimized plate carrier. Interior slots behind the center top loop placard allow for an easy solid attachment of an ATAK flip down adaptor. The low-profile design allows for easy packability and storage. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-114



The **R-SERIES™ SIDE MOLLE PANEL SET** adds versatility by creating extra real-estate on the **R-SERIES™** configurations for attaching standard MOLLE pouches. This allows more options for attaching radios or magazines to the more minimalist configurations or maximizing the options for the larger configurations. The Velcro® attachment system allows for easy attachment to the vest. An ambidextrous design allows the user to place the platform on the right or left, front or back. Sold as a set. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE




BLACK

RSR-107

## 12.17 R-SERIES™ M4 MAG RETAINER

12.17

88

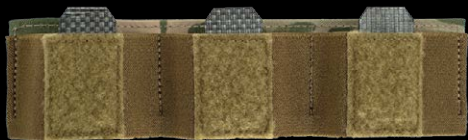

The **R-SERIES™ M4 MAG RETAINER** adds M4 magazine carry capability to the **R-SERIES™ HARNESS ADAPTER**. This makes it possible to hold 6 magazines when combined with the **R-SERIES™ M4 FLAP** in the JUMP configuration. The easy installation and removal of the retainer adds to the modularity of the entire system. Rigid TEGRIS® tabs allow for ease of insertion of magazines. Made in the US from US materials.

### COLORS



COYOTE



BLACK

RSR-115



## 12.18 R-SERIES™ SHOULDER PAD SET

12.18

89



The **R-SERIES™ SHOULDER PAD SET** adds additional comfort to the **JPC R-SERIES™**. Heavier loadouts can cause pressure points and fatigue. These pads can be quickly added to the shoulder straps to help disperse weight. Adjustable top flaps with interior hook ensures the pads stay in place. One-Wrap® side loops add extra control of comm cable or hydration tube. Sold as a set. Made in the US from US materials.

### COLORS



MULTICAM®



R. GREEN



COYOTE



BLACK

RSR-105

## 13 CARE INSTRUCTIONS

---

- **DO NOT** machine wash or dry
- Remove dirt by using a cloth or soft brush
- Hand wash carrier with warm water and cloth or soft brush
- Air dry indoors or in shade

## ABOUT US

---

Crye Precision designs and manufactures truly innovative equipment for America's fighting forces. We are proud and honored to serve our customers' needs. We spend as much time as we can with users, continuously incorporating their experience and feedback into the gear. We give them our full support and are indebted to them for their service and their sacrifice. We make uncompromising gear for uncompromising individuals. We work hard to provide smart, high-performance, long-wearing gear for people who demand the best. We make all of our gear in America from American materials. Every item is designed to help you perform better.

## WARRANTY

---

If a defect in materials or workmanship is found in any of our products, we will repair or replace it, free of charge, for the lifetime of the product. This excludes normal wear and tear. Be aware that the customer is responsible for any and all return shipping charges. This applies to the original purchaser and is nontransferable.

## BODY ARMOR

---

It is against Federal Law for a person convicted of a violent felony to purchase or possess body armor. In addition, various states also have laws restricting the purchase or possession of body armor by persons convicted of certain felonies, other crimes of violence, or drug crimes. By purchasing body armor, you acknowledge and certify that (i) you have no felony convictions, (ii) you have not been convicted of any other crime that would restrict your ability to purchase or possess body armor under any Federal or State law, (iii) you do not intend to use the body armor for any criminal purpose and (iv) you are over 18 years old. Crye Precision reserves the right, in its sole discretion, to refuse to sell body armor to any person. Additionally, the sale of body armor to residents of Connecticut is restricted to in-person sales, unless the sale is made to certain law enforcement or military personnel. We require that all orders of body armor be accompanied by a government issued photo identification.

## CONTACT INFO

---

Crye Precision LLC  
Brooklyn Navy Yard  
63 Flushing Ave Unit 252  
Building 128B  
Brooklyn, NY 11205

Phone: 1.718.246.3838  
Fax: 1.718.246.3833  
sales@cryeprecision.com  
www.cryeprecision.com

## COPYRIGHT

---

© 2024 Crye Precision LLC. The 'CP' logo is a registered trademark of Crye Precision LLC.



**SERVING  
THOSE WHO  
PROTECT  
FREEDOM™**

