

AIRFRAME™

ACCESSORY INSTALLATION GUIDE

WARNING

This guide must be carefully read by all persons who have or will have the responsibility for using or maintaining the AirFrame™ helmet and its additional accessories. This system will perform as designed only if used and maintained according to these instructions.



Note: Screws and anchors A and B are identical; screw and anchor C is different.

1. Remove screws and anchors A, B, and C from helmet. Both helmet strap ends will detach from the helmet. Be sure to only work on one side of the helmet at a time in order to simplify installation (left side shown).

The AirFrame™ Ear and Chop accessories are designed to be used in conjunction with Rails (sold separately).



2. Turn helmet over to view interior. If necessary, remove pads to access hardware.

Insert the longer metal end of AirFrame™ accessory mount between helmet halves as shown so that the cutout in the mount is aligned with the hole for screw and anchor C.

Be certain to use the correct mount for the appropriate side of your helmet (see picture for reference).

3. With the longer end of the mount inserted between helmet halves, pivot the other side of the mount into position as shown so that the cutout in the shorter metal end of the accessory mount is aligned with the hole for screw and anchor A.



4. Reinsert screw and anchor C as shown and loosely tighten so that the mount is still movable and can be easily repositioned.






5. Place left Rail on exterior side of helmet. Ensure helmet straps are not twisted. Insert anchors A and B into strap ends. Secure Rail and straps to helmet. Loosely tighten screws A and B so that the Rail and strap ends are still movable and can be easily repositioned.




6. Turn helmet over to view exterior side of helmet. Insert left Chop or Ear into mount opening. Ensure that the rear lip of the insert (Chop or Ear) slides in between the Rail and helmet.

7. Adjust position of Rail so that there is as little of a gap as possible between the Chop or Ear and the Rail as shown. This ensures that the Chop or Ear will remain aligned with the edge of the helmet.

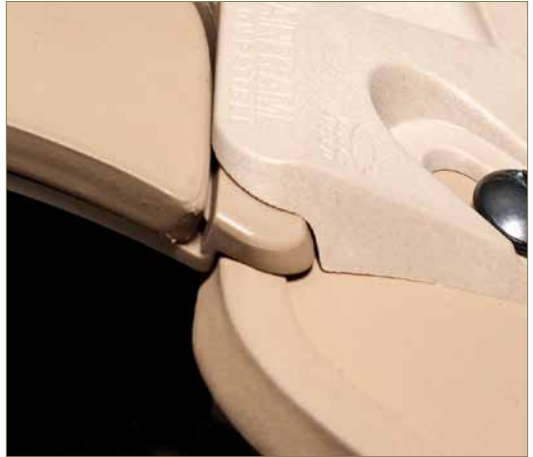

8. Turn helmet over to view interior side of helmet. Align edge of Chop or Ear to the inside edge of the helmet as illustrated.



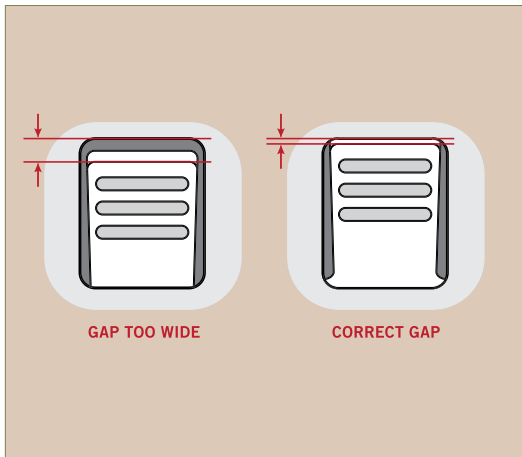

9. Adjust position of mount so that the release tab is centered in mount opening. There should be a small gap between the top edges of the release tab and mount opening as illustrated. This ensures that the Chop or Ear will seat properly when inserted.




10-A. Ensure that the front strap end is parallel to the inside edge of the helmet. Tighten screw and anchor A. Proper torque value of screw/anchor A is 20 in-lb. Non-permanent thread locker may be applied to screw/anchor as necessary.

10-B. Ensure that the rear strap end is parallel to the inside edge of the helmet. Tighten screw and anchor B. Proper torque value of screw/anchor B is 20 in-lb. Non-permanent thread locker may be applied to screw/anchor as necessary.



11. Double check the position of all the components: Rail, Chop/Ear, accessory mount, and helmet strap ends. Tighten screw and anchor C. Proper torque value of screw/anchor C is 6 in-lb. Non-permanent thread locker may be applied to screw/anchor as necessary. Repeat installation instructions for right side of helmet.

Test accessory mount installation by inserting and releasing Chop or Ear into mount. The accessory should snap into place and securely fit so that it cannot be removed without pressing the release tab. Repeat installation instructions for right side of helmet.

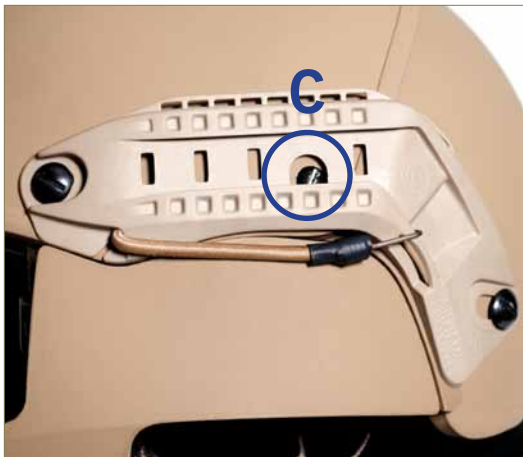

ABOUT US

Crye Precision designs and manufactures truly innovative equipment for America's fighting forces. We are proud and honored to serve our customers' needs. We spend as much time as we can with users, continuously incorporating their experience and feedback into the gear. We give them our full support and are indebted to them for their service and their sacrifice. We make uncompromising gear for uncompromising individuals. We work hard to provide smart, high-performance, long-wearing gear for people who demand the best. We make all of our gear in America from American materials. Every item is designed to help you perform better.

WARRANTY

If a defect in materials or workmanship is found in any of our products, we will repair or replace it, free of charge, for the lifetime of the product. This excludes normal wear and tear. Be aware that the customer is responsible

for any and all return shipping charges.

This applies to the original purchaser and is nontransferable.

BODY ARMOR

It is against Federal Law for a person convicted of a violent felony to purchase or possess body armor. In addition, various states also have laws restricting the purchase or possession of body armor by persons convicted of certain felonies, other crimes of violence, or drug crimes. By purchasing body armor, you acknowledge and certify that (I) you have no felony convictions, (II) you have not been convicted of any other crime that would restrict your ability to purchase or possess body armor under any Federal or State law, (III) you do not intend to use the body armor for any criminal purpose and (IV) you are over 18 years old. Crye Precision reserves the right, in its sole discretion, to refuse to sell body armor to any person. Additionally, the sale of body armor to residents of Connecticut is restricted to

in-person sales, unless the sale is made to certain law enforcement or military personnel. We require that all orders of body armor be accompanied by a government issued photo identification.

CONTACT INFO

Crye Precision LLC
Brooklyn Navy Yard
63 Flushing Ave Unit 252
Brooklyn, NY 11205

Phone: 1.718.246.3838

Fax: 1.718.246.3833

E-mail: sales@cryeprecision.com

Web: www.cryeprecision.com

COPYRIGHT

© 2013 Crye Precision LLC. AirFrame™, Crye Precision™, and the 'CP' logo are trademarks of Crye Precision LLC.

**SERVING THOSE
WHO PROTECT
FREEDOM™**



CRYE PRECISION.